


INSTALLATION GUIDE

Rockfon® System Eclipse Island™

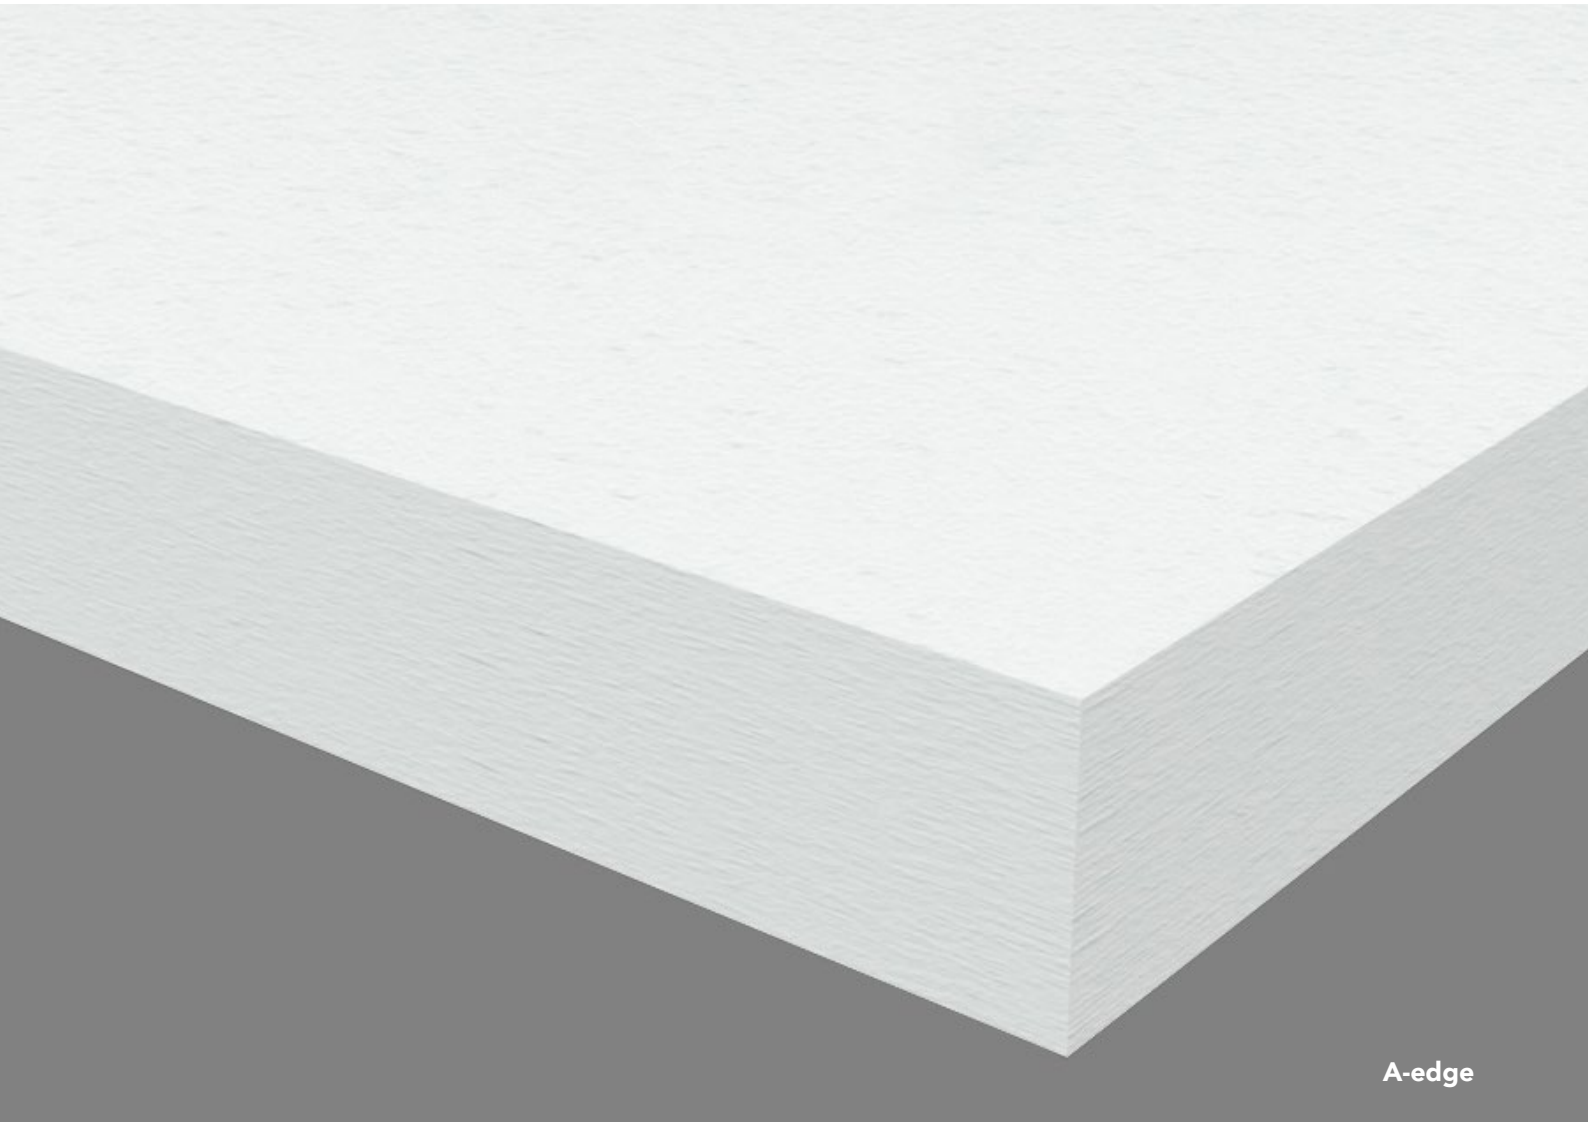

Frameless island system

- Ideal solution for rooms where a suspended ceiling is technically or aesthetically not suitable
- Perfect solution for room acoustic improvement
- Available in different shapes and colours
- Quick and easy installation

Sounds Beautiful

Description

Rockfon® System Eclipse Island™ is a frameless acoustic solution available in a variety of geometric shapes and colours. There are three different versions:

- Rockfon Eclipse (white)
- Rockfon Eclipse Colour (11 standard colours*)
- Rockfon Eclipse Customised (custom colours)

All islands feature a minimalist painted A-edge and the reverse side is covered with a white acoustic fleece.

Rockfon Eclipse can be suspended under an existing soffit, T24 grid or gypsum ceiling. Using specifically designed accessories, it can be fixed directly to the soffit itself (page 12-14). The Rockfon Eclipse Rectangle, 2360 x 1160 x 40 mm, has two special white aluminum profiles that are integrated to the rear of the island providing extra stability during installation.


This acoustic system is ideal in rooms and buildings where the use of a traditional suspended ceiling is technically not appropriate (e.g. where the principle of thermal mass is incorporated in the building design) or is not included in the design. It is a practical and flexible solution for new build and retrofit projects.

Restrictions

Due to the risk of corrosion, the suspension accessories of Rockfon System Eclipse Island should not be used in swimming pools or outdoor environments. Furthermore, Rockfon System Eclipse Island should not be used in areas subjected to wind load and drafts.

We advise a min. gap of 4 mm should be maintained between the edges of two Rockfon Eclipse Islands; they should not butt against each other.


*Please reference our Rockfon Eclipse Colour datasheet to see available colours.

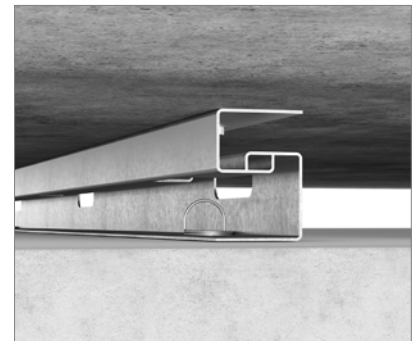


Direct fix can be made using the Rockfon Eclipse Direct Solution Suspension Kit.



Rockfon spiral anchor is included in both Rockfon Eclipse suspension kits.

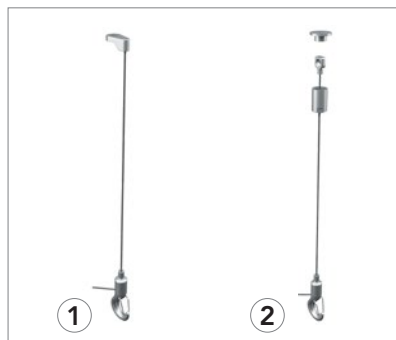





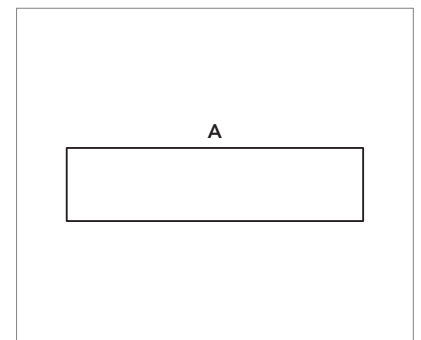


For suspended Rockfon Eclipse islands, Rockfon has two suspension kit options which include 1500 mm adjustable metal wire and safe attachment hook.
1. Classic solution
2. Design solution



Minimalistic painted straight A edge.

System components

Rockfon Eclipse is available in a variety of geometric shapes:

Rockfon Eclipse				
Shapes	Dimensions (mm)	Weight (kg/unit)	MS* (mm)	Suspension hangers required
 Square	1160 x 1160 x 40**	9.0	150	4 suspension hangers
				4 spiral anchors
 Rectangle	1760 x 1160 x 40	13.0	150	6 suspension hangers
	2360 x 1160 x 40 (additional load added: LED light, PIR etc)	17.0	150	6 spiral anchors
				6 suspension hangers
	2360 x 1160 x 40 (no additional load added)	17.0	150	6 spiral anchors
 Circle	800 x 800 x 40	3.0	150	3 suspension hangers
	1160 x 1160 x 40**	7.0	150	3 spiral anchors
				4 suspension hangers
				4 spiral anchors
 Triangle	1160 x 1005 x 40	4.0	150	3 suspension hangers
				3 spiral anchors
 Hexagon	1160 x 1006 x 40	6.0	150	4 suspension hangers
				4 spiral anchors
 Oval	1760 x 1160 x 40	10.0	150	6 suspension hangers
				6 spiral anchors
 Bespoke	1760 x 1160 x 40	9.0	150	Dependent on shape

* MS – Minimum suspension excluding tile.

All rectangle and square Rockfon Eclipse in custom colours are only available in a Be-edge. Size 2360 x 1160 x 40 is only available in custom colours on one side. Contact us for special shapes, colours, sizes, lead times and minimum quantities.

**Available as Rockfon Eclipse Colour.

Rockfon Eclipse should be secured with a suspension kit comprising a 1500 mm long adjustable metal wire and a safety attachment hook. Once assembled, the wire is attached to the island by a spiral anchor that is delivered together with the Rockfon Eclipse suspension kit.

We provide two suspension kits; the Classic solution and the Design solution, the latter is relevant for projects where aesthetics are important.

Rockfon Eclipse suspension kits – Classic solution	
Suspension kits/box	Weight (kg/box)
16 suspension hangers + 16 spiral anchors	0.91
24 suspension hangers + 24 spiral anchors	1.40

The Rockfon Eclipse Classic suspension kit can be secured using a standard screw that corresponds to the relevant soffit material (e.g. concrete, wood...).

Rockfon Eclipse suspension kits – Design solution	
Units/box (incl. spiral anchors)	Weight (kg/box)
8 suspension hangers + 8 spiral anchors	0.44
12 suspension hangers + 12 spiral anchors	0.80
8 suspension hangers + 12 spiral anchors*	0.50

*Rockfon Eclipse Rectangle 2360 x 1160 mm without additional load.

The Rockfon Eclipse Design suspension kit features a refined cylindrical capping that hides the screw thread and provides a visually appealing finish. It can be fastened using a standard screw that corresponds to the relevant soffit material. Alternatively, an M6 threaded fixing can be used.

We only guarantee the integrity of the Rockfon System Eclipse Island if it is installed with Rockfon spiral anchors.

Island - A Edge



Accessories for suspended system

Spiral anchor



Suspension kits – Classic solution



Suspension kits – Design solution



T24 white sign hanger clip – Design Solution



Suitable for use with Suspension kits – Design Solution.

Accessories for direct fix system

Shallow profiles



Shallow profiles (part of the Direct Fix Suspension Kit).

Direct fixing bracket



Suitable for islands up to 1200 x 1200 mm in size. For larger sizes use the direct fix system comprising shallow profiles.

Performance



System load bearing capacity

The maximum load per spiral anchor is 5 kg. Refer to the Service Integration section for recommendations regarding cutouts, for the integration of lights and similar services.



Corrosion resistance


Due to the risk of corrosion, the suspension accessories of Rockfon System Eclipse Island should not be used in swimming pools or outdoor environments.

Compatible islands

Only Rockfon Eclipse can be used in a Rockfon System Eclipse Island.


Installation

When installing any of the Rockfon System Eclipse Island shapes, please use the marking tool which is included in the kit, as shown below:

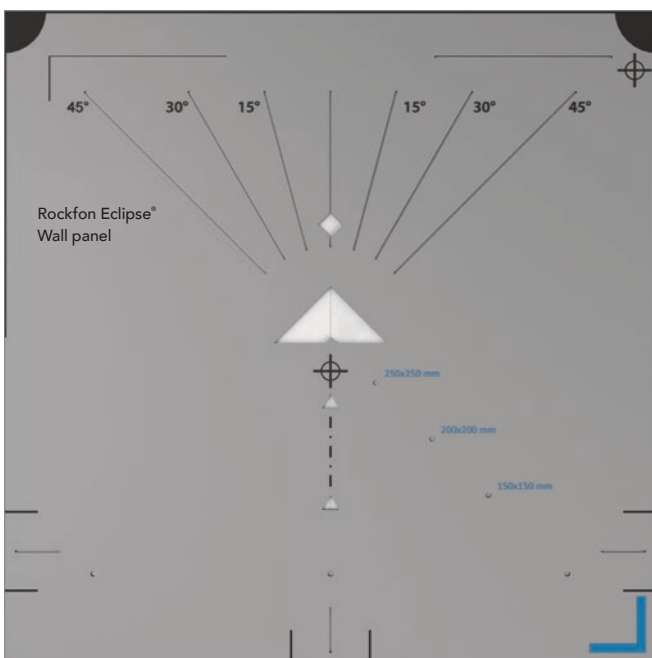

Marking tool.

Black prints are for the Rockfon Eclipse Wall panel.
Blue prints are for the Rockfon Eclipse Island.

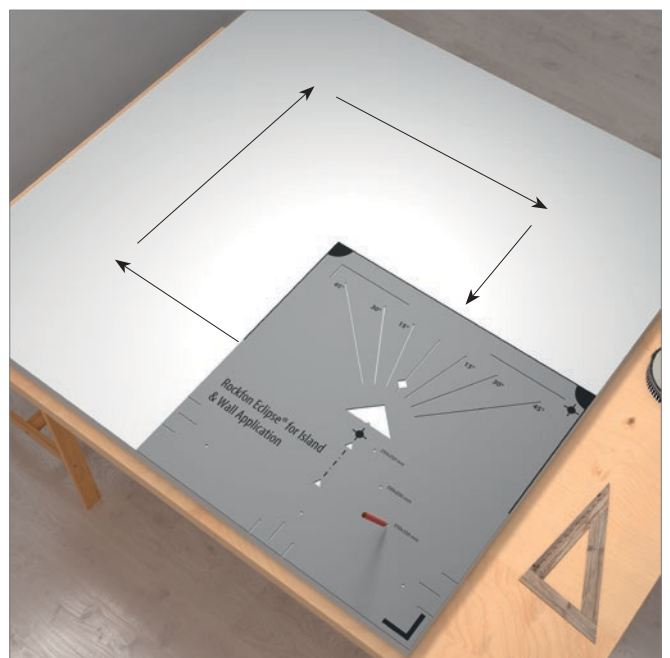

Installation

Boxes should be handled with care and by two people. They should be stored in a flat, horizontal position. Each box contains a pair of gloves that should be worn when handling Rockfon Eclipse.

For an optimum work environment, we recommend installers always observe good manual handling practices and follow the installation advice, as shown on our packaging.

Fixing spiral anchors to the Island

**Rockfon Eclipse Square 1160 x 1160 mm and
Rockfon Eclipse Rectangle 1760 x 1160 mm**

Spiral anchors need to be screwed vertically into the back of the island at a minimum distance of 150 mm from the edge.

The minimum distance between spiral anchors should be 600 mm. The maximum load per spiral anchor is 5 kg. Four spiral anchors are required for a 1160 x 1160 mm island. In the case of 1760 x 1160 mm islands, six suspension points are required and should be distributed evenly.


To minimise the risk of damage and for quicker and easier installation, a Rockfon Eclipse island should be handled by two people.

Note: Eclipse islands in dark colours are supplied wrapped in a transparent protective film to reduce the risk of finger marking etc. during handling and installation.

NB: Most of the protective film should be left on the island until installation is complete.

Spiral anchors should not be fitted through the film. Carefully remove a small area of film in suspension locations before fitting spiral anchors to the island.

Guidance for making cut outs in Eclipse islands with protective film can be viewed on page 19. When installation is complete carefully peel back and remove the protective film from the island.

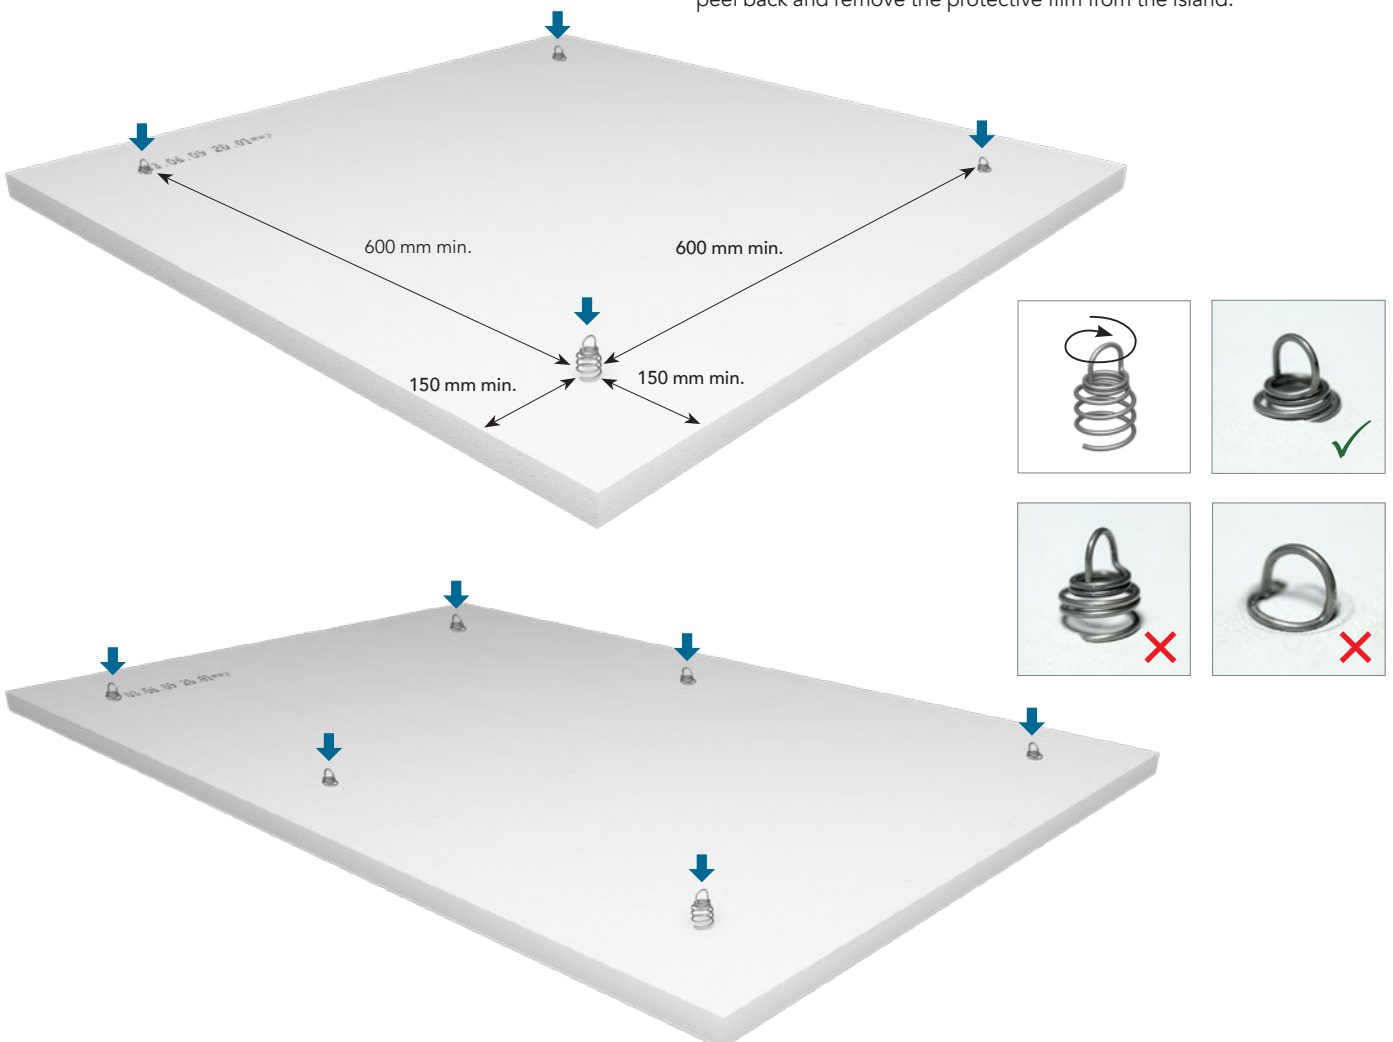

Rockfon Eclipse Rectangle 2360 x 1160 mm



Rockfon Eclipse Rectangular 2360 x 1160 mm is manufactured with two aluminum profiles integrated into the back of the island. Both profiles have five holes where a spiral anchor can be placed. The position of the spiral anchors is dependent on the installation method (described below), but for safety reasons at least six spiral anchors are needed in all situations.

Note: It is highly recommended to install Rockfon Eclipse Rectangle 2360 x 1160 mm level so that the weight is distributed evenly over all suspension points. The use of an installation table can be very helpful!

Installation method 1 (without additional load)

When no additional weight is being supported by the island, it can be installed by using only four suspension points (although six spiral anchors must be screwed into the island). **Do not use the outer holes.**



Rockfon Eclipse Rectangle 2360 x 1160 without additional weight: 6 No. spiral anchors, 4 No. suspension hangers.

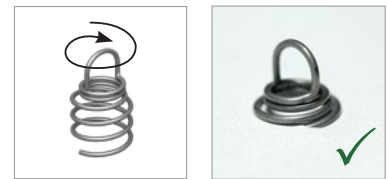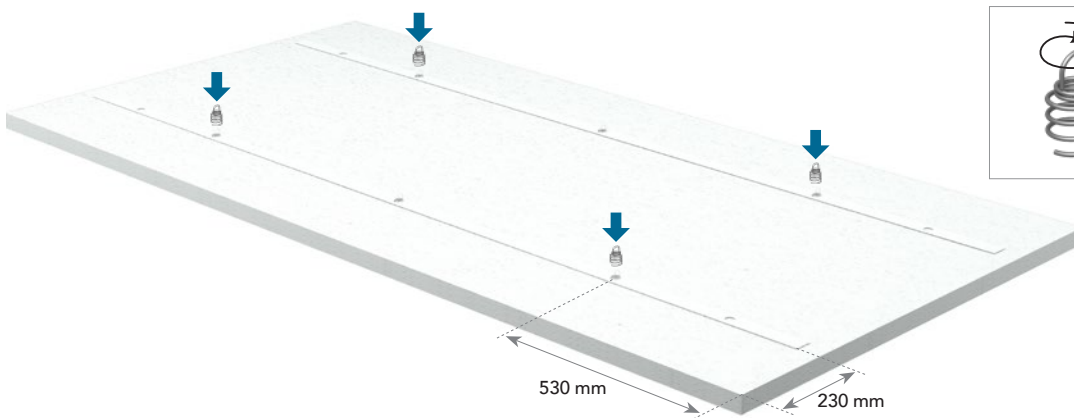

Installation method 2 (with additional load)

When additional weight is being supported by the island (max. 5 kg), the island needs to be installed by using six suspension points. **Use the outer holes.**


Rockfon Eclipse Rectangle 2360 x 1160 with additional weight (max. 5 kg): 6 No. spiral anchors, 6 No. suspension hangers.

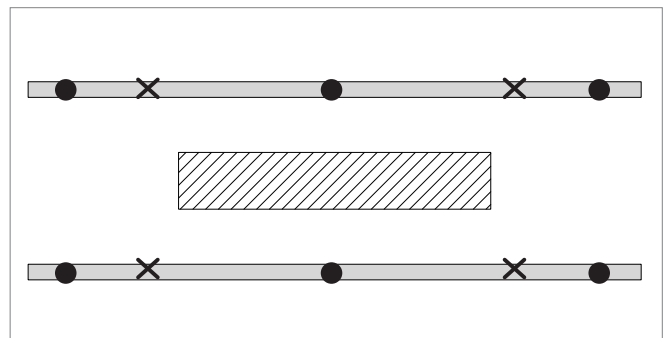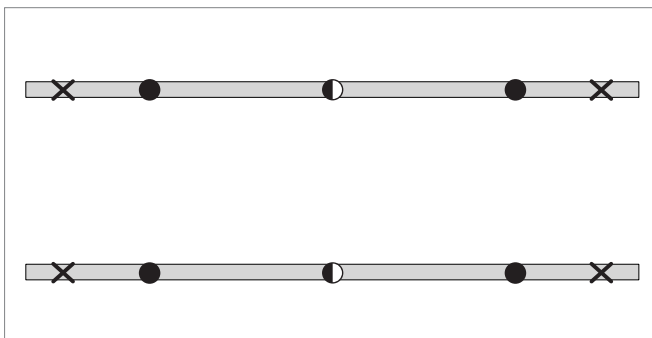

Rockfon Eclipse Shapes


The spiral anchors should be distributed symmetrically as indicated below and at a minimum distance of 100-150 mm from the edge.

Circle

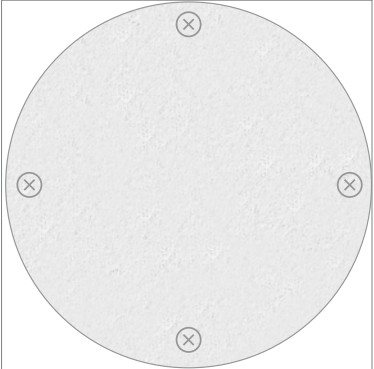


Eclipse circle of 800mm diameter can also be suspended with 3 hangers.


Hexagon

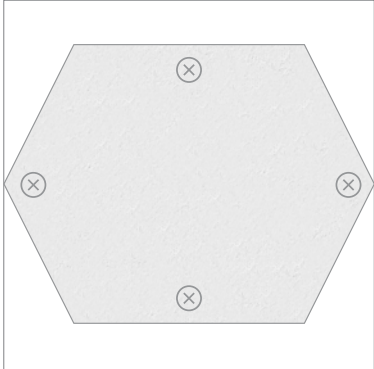

Triangle

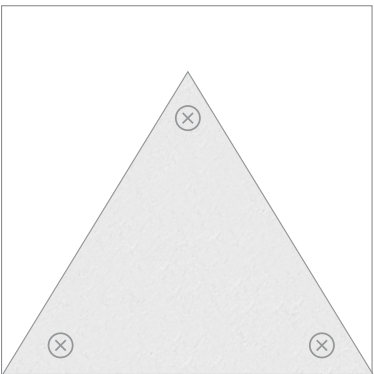

Oval

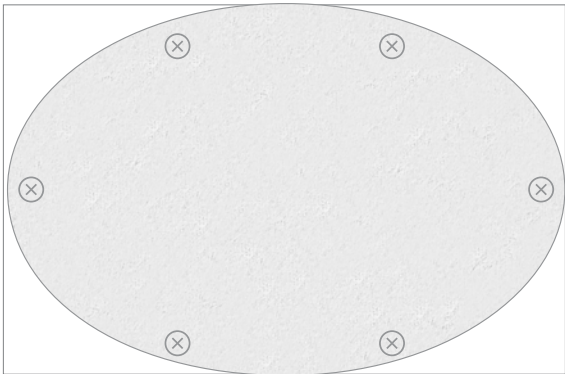


Connecting Rockfon System Eclipse Island to the structure

Please ensure that the supporting structure is solid and that it has a load bearing capacity of at least 25 kg. Attach the wire to the soffit fixing points. Slide the wire into the hook. The system locks automatically providing maximum safety. Attach the hooks to all of the spiral anchors. Ensure that all hooks are correctly attached before


raising the island to the required height. Use two people in order to prevent the island being only attached by one or two hooks.

The maximum load per wire is 5 kg, and the minimum installation depth should be 150 mm.

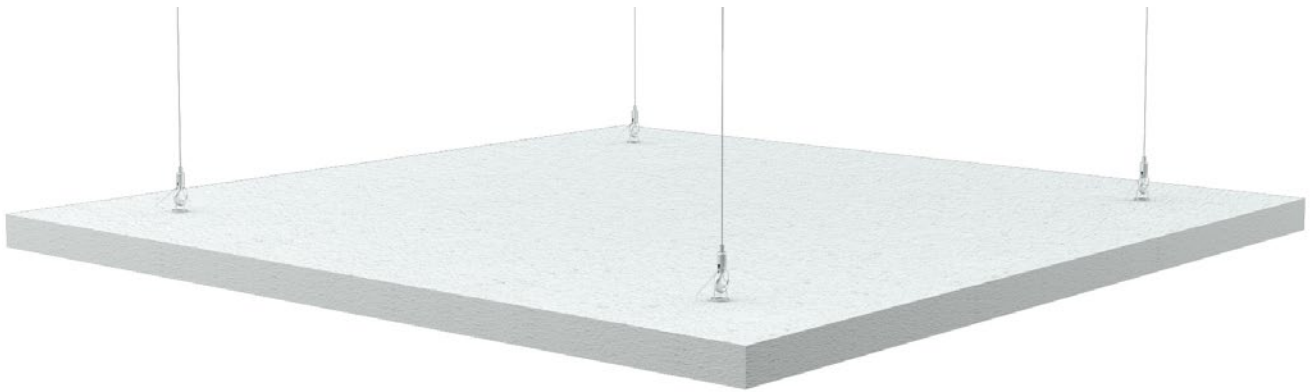

Levelling


Adjust the level by using a spirit level. Always ensure the island is attached at all points so that the weight of the island is evenly distributed. Rockfon Eclipse can also be installed at a maximum angle of 45°.

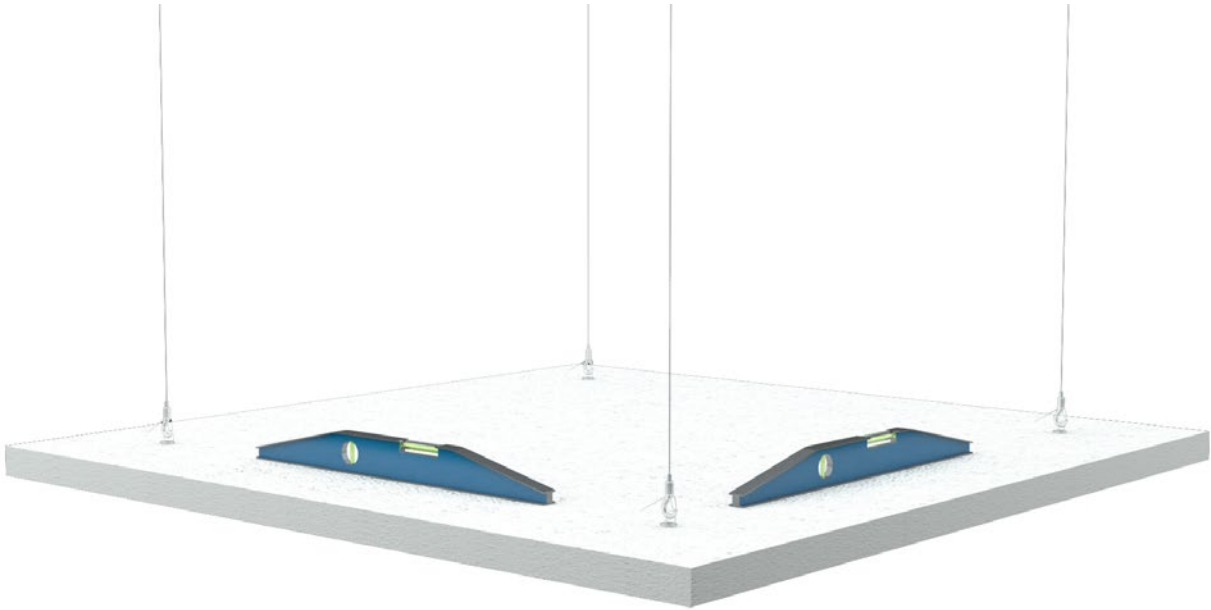

Installing Rockfon System Eclipse Island below an existing suspended ceiling

It is possible to suspend Rockfon Eclipse islands from an existing ceiling grid. Check to ensure that the grid can support the load of the islands. Various connection accessories are available and it should be confirmed that the accessory is compatible, can support a weight of 5kg, and can support the load of the island. Refer to illustrations 1 and 2.

It is also possible to install the Rockfon System Eclipse Island below a suspended ceiling by having the wires pass through the ceiling tiles and fixing the suspension kit to the structure (eg. concrete soffit) as in illustration N°3.

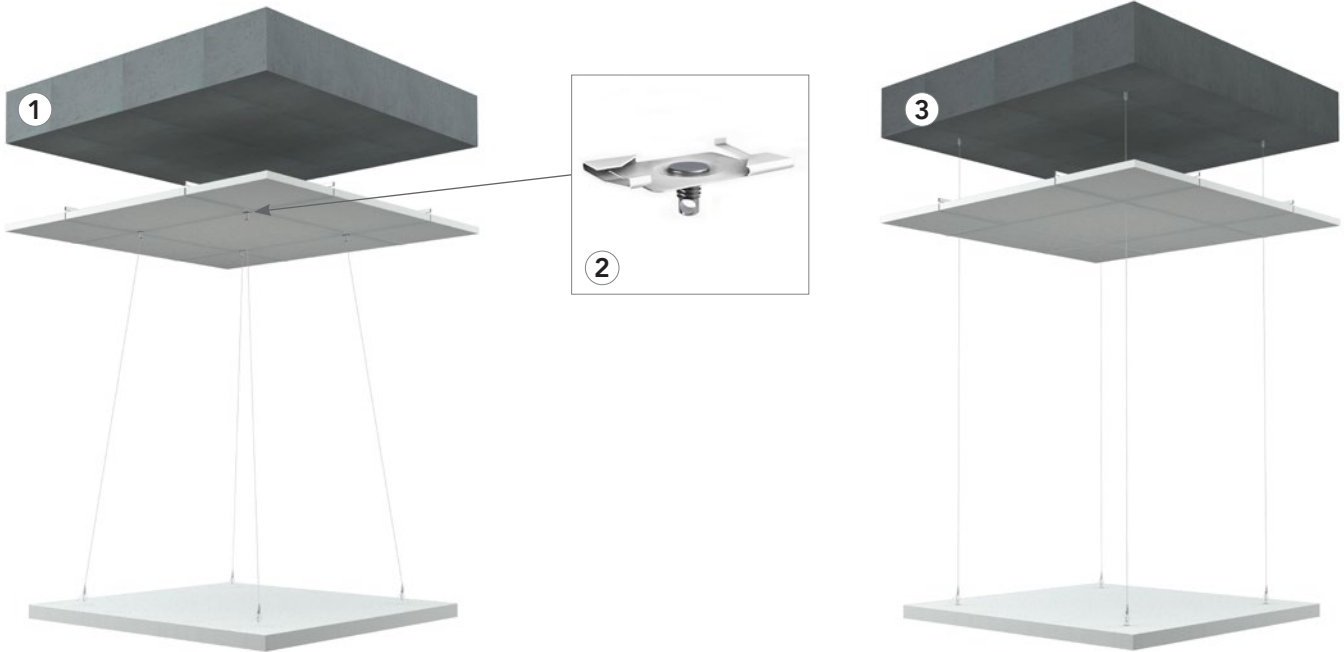

Installing Rockfon System Eclipse Island below an existing gypsum ceiling

Using a plate: Check with the plate supplier to ensure it can support a load of 5 kg per suspension point.


Drill a hole into the gypsum board. Slide the cable stopper plate through the hole and let it rest flat above the gypsum board.



Using a gypsum plug

Check with the gypsum plug supplier to ensure it can support a load of 5 kg. Screw the gypsum plug with an M6 fixing into the gypsum board.

Fix the Rockfon Eclipse Design suspension kit to the M6 fixing.

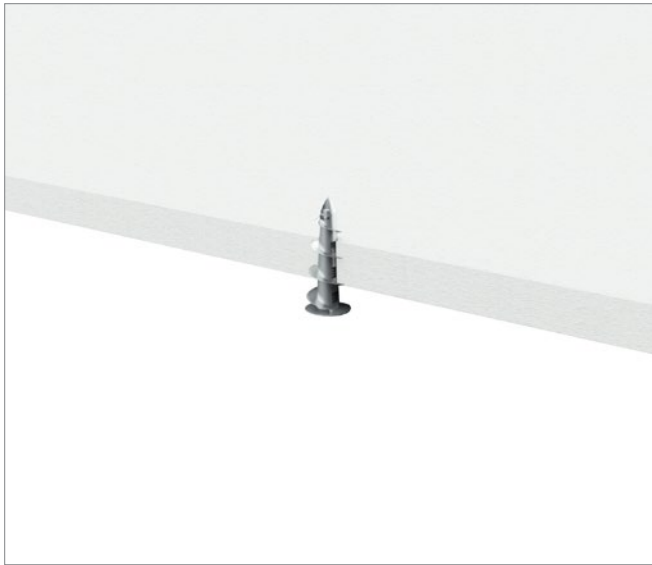

Using a spring toggle

- 1) Check with the spring toggle supplier to ensure it can support a load of 5 kg. Drill into the gypsum board. Screw the M6 threaded rod into the spring toggle. Insert it into the gypsum board.
- 2) Once the spring toggle passes through the other side of the gypsum board, it opens out and holds the threaded rod in place.
- 3) Screw the Rockfon Eclipse Design suspension kits into the M6 threaded rod.



Installing Rockfon System Eclipse Island direct to the soffit


Direct installation of Rockfon Eclipse to the soffit is possible with the Rockfon Eclipse Direct Solution Suspension Kit. The space between the rear side of the island and the soffit is 45 mm. Follow the installation sequence shown in Diagrams A-D below.

Installation method

Ensure that the soffit is smooth and even. Carry out any smoothing/levelling work before installation of the system. If necessary, install a framework to compensate for uneven soffits.



We recommend that for safety purposes and to maintain alignment, some additional basic galvanised metal angle brackets - or screws - should be installed as 'stops' at the end of the direct fix profiles.

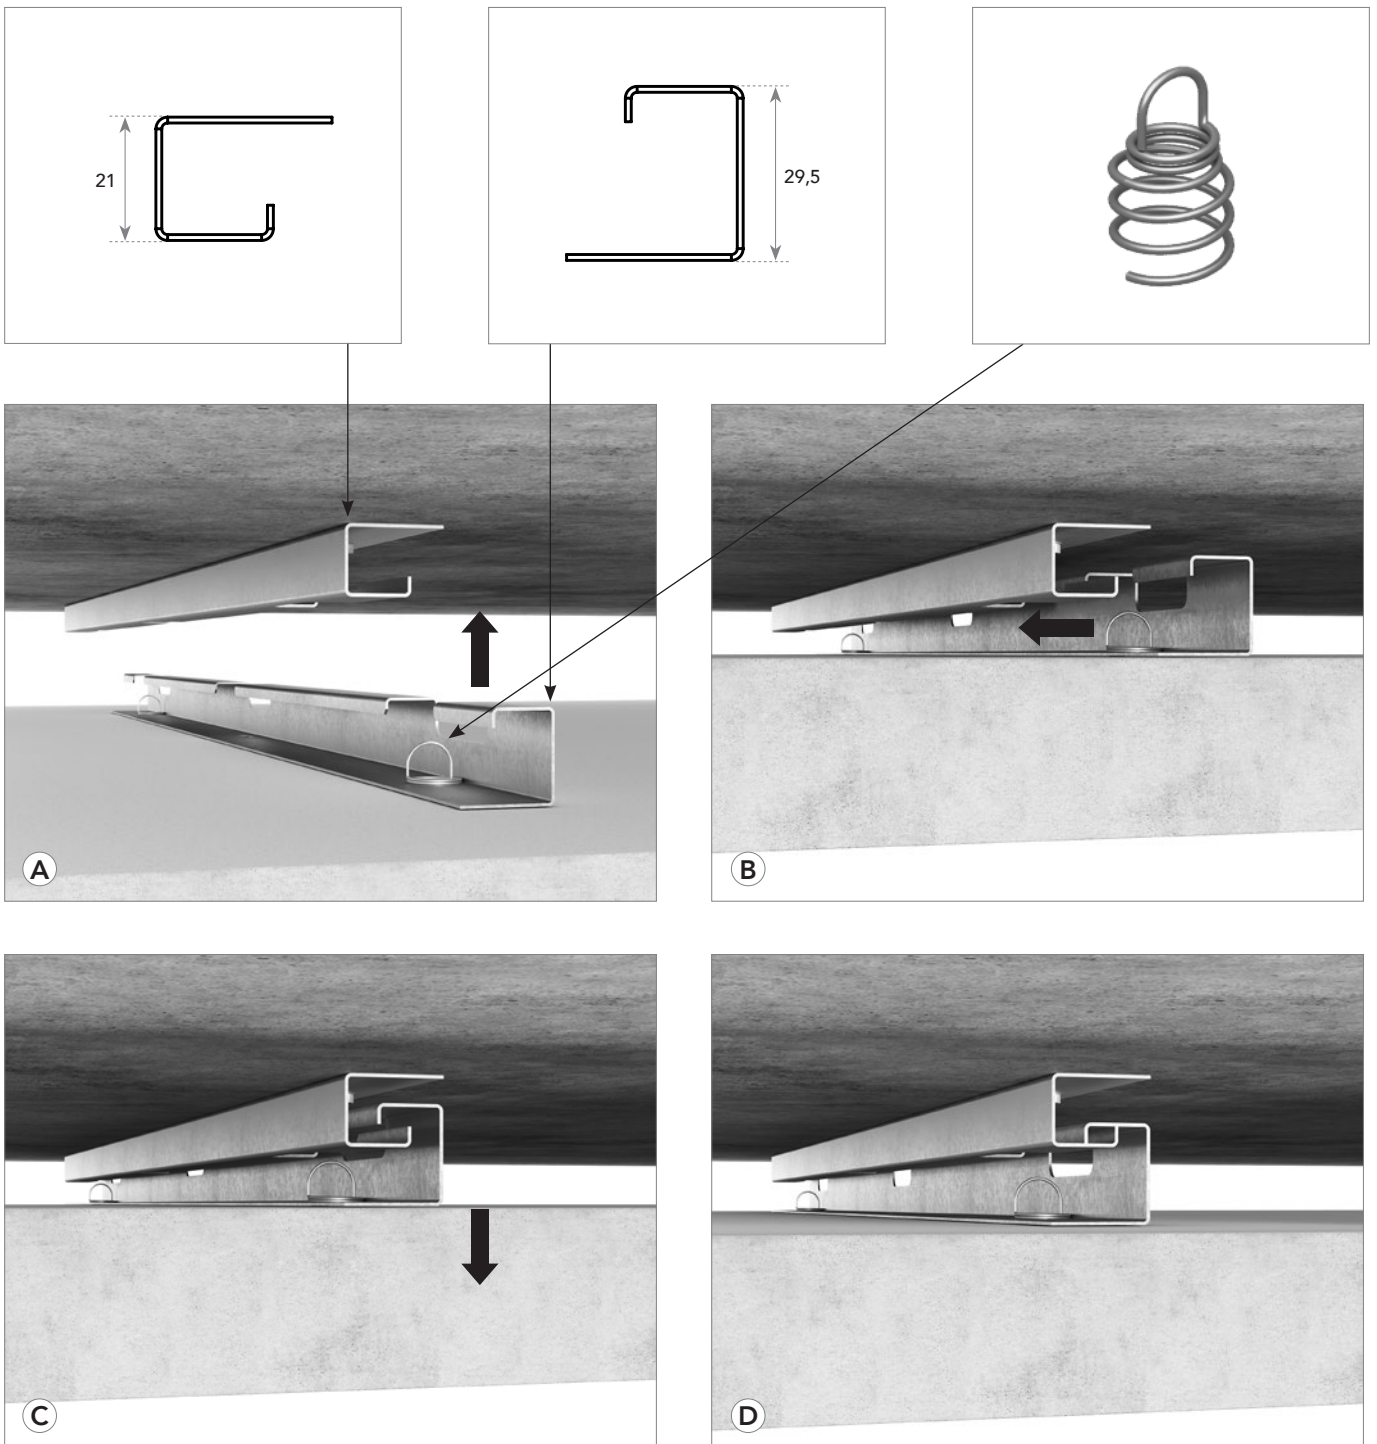Not levelling the soffit can cause some visible height differences between soffit and island.








Rockfon Eclipse Direct Solution Suspension Kit

We provide three suspension kits: one for 1160 x 1160 mm Rockfon Eclipse Islands, one for the 1760 x 1160 mm islands and one for the 2360 x 1160 islands, both consisting of 2 soffit profiles, 2 islands profiles, and 4 or 6 spiral anchors.


Rockfon Eclipse – Direct fixing solution			
Shape	Dimensions	Direct Fixing Kit	Note
Square 	1160 x 1160 x 40	8 soffit profiles + 8 island profiles + 16 spiral anchors	Components for 4 Rockfon Eclipse islands
Rectangle 	1760 x 1160 x 40	8 soffit profiles + 8 island profiles + 24 spiral anchors	Components for 4 Rockfon Eclipse islands
	2360 x 1160 x 40	4 soffit profiles + 4 island profiles + 12 spiral anchors	Components for 2 Rockfon Eclipse islands

Installation layouts

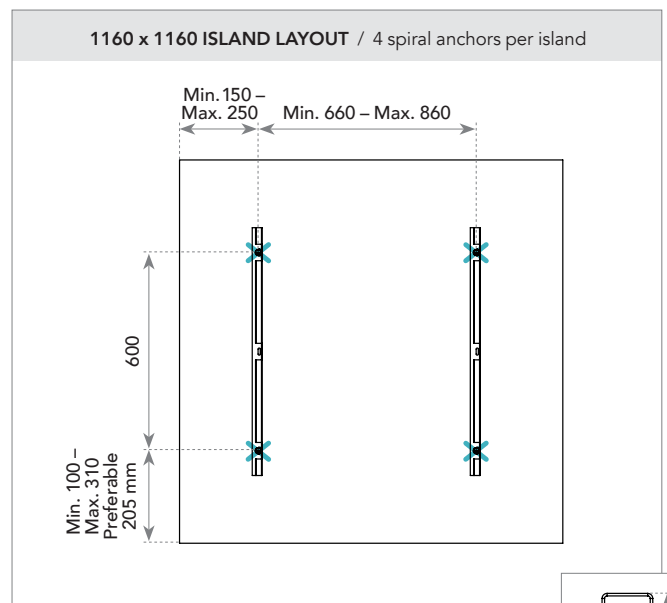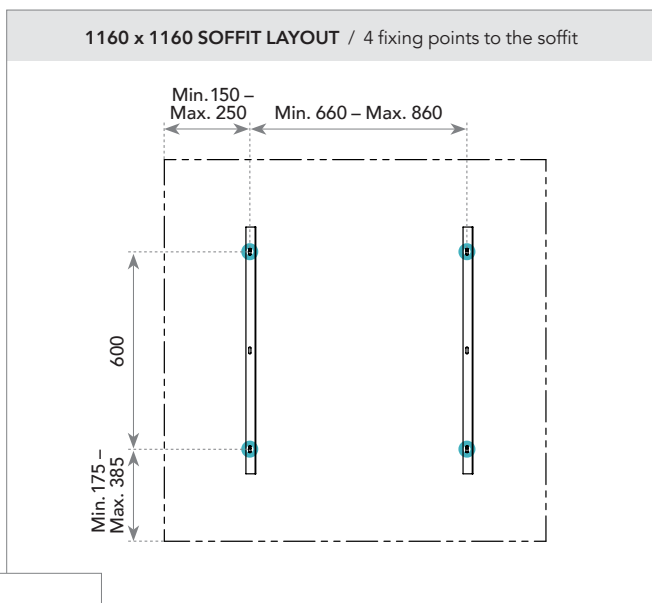

-  Spiral anchors
-  Suspension points




SOFFIT PROFILE





ISLAND PROFILE

-  Spiral anchors
-  Suspension points


1760 x 1160 SOFFIT LAYOUT / 6 fixing pints to the soffit

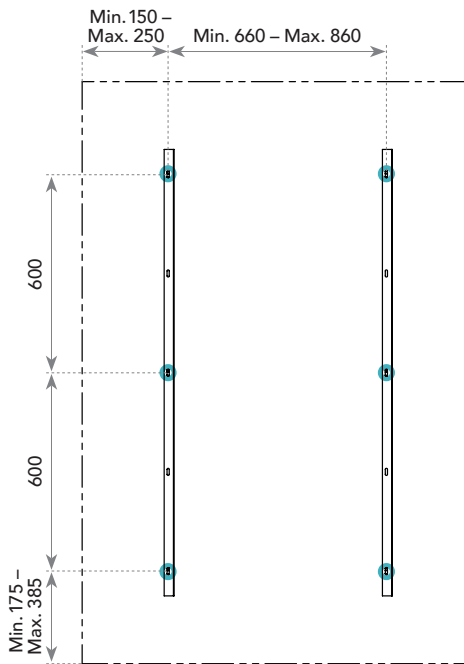

1760 x 1160 ISLAND LAYOUT / 6 spiral anchors per island

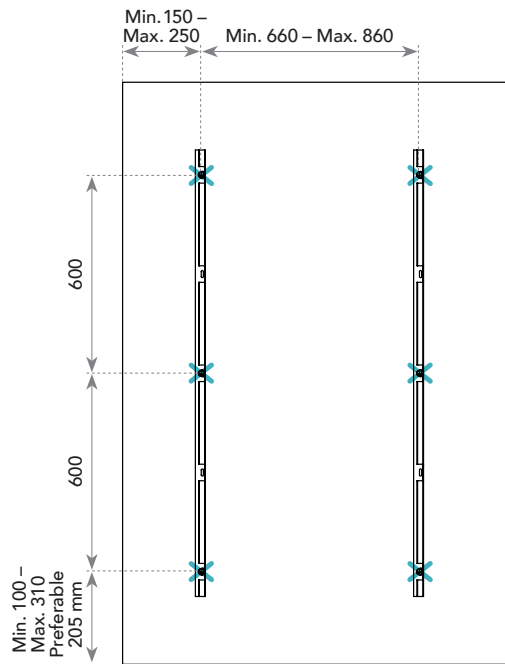


SOFFIT PROFILE




ISLAND PROFILE

2360 x 1160 SOFFIT LAYOUT / 6 fixing points to the soffit

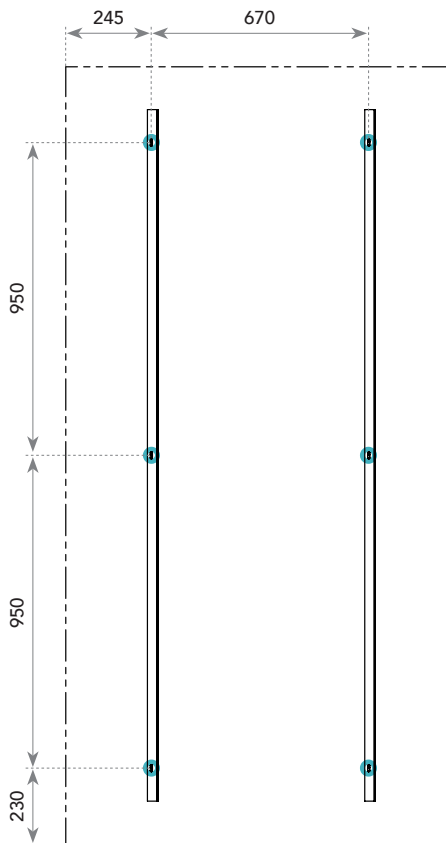




2360 x 1160 ISLAND LAYOUT / 6 spiral anchors per island

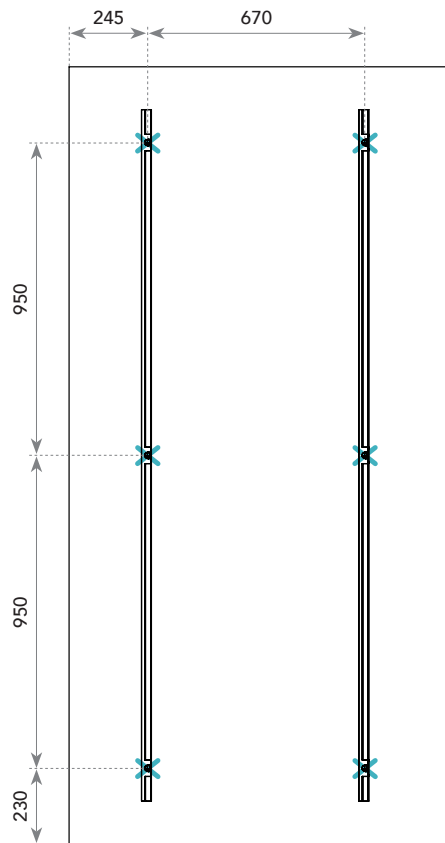

Installing Rockfon System Eclipse Island direct on to the concrete soffit

For small islands: Direct installation of Rockfon Eclipse to the concrete soffit is possible with the "shallow" direct fix bracket (Image 1 below) and the dedicated direct fix spiral anchor (Image 2 below). Together they make up a small island direct fix kit. The space between the island and the concrete soffit will be approximately 15 mm.

Direct installation is not recommended for islands larger than 1200 x 1200 mm.

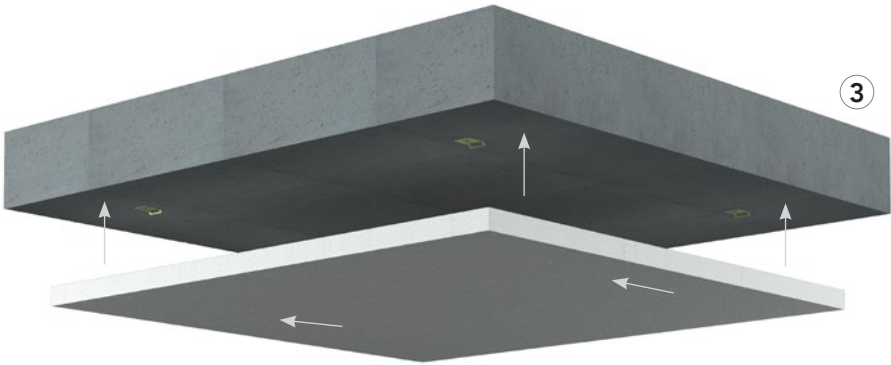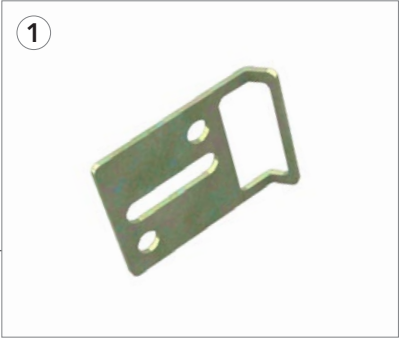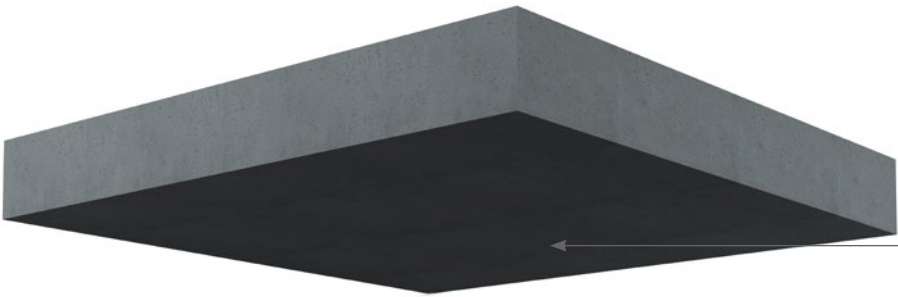


Lift island to the concrete soffit, then slide into the brackets.

Rockfon Eclipse Island cutout table

Rockfon Eclipse Island	Square 1160 x 1160 mm	Rectangle 1760 x 1160 mm	Rectangle 2360 x 1160 mm	Circle Ø800 mm	Circle Ø1160 mm	Hexagon 1160 mm	Triangle 1160 mm	Oval 1760 mm
Min. cutout distance from edge (mm)	300	300	470 long side 350 short side	200	200	200	200	200
Max. cutout Size (mm)	560 x 560	1160 x 560	1420 x 460	Ø400	Ø760	350 edge	468 base	1360/760

Common information on cutouts

- The dimensions in the drawings are maximum allowable cutouts.
- We advise to install lights or similar services symmetrically in the islands. Installation of lighting fixtures or other services should be completed according to the advice given above by Rockfon.
- We advise to use either a knife or a jigsaw to create the cutouts. However, the islands needs to be protected against scratches and dust. This can be done by putting a cardboard or paper between the jigsaw and the panel as protection.
- Other cutout forms are possible, as long as they don't exceed the max. cutout area.
- Instead of one large cutout it is also permitted to have several smaller cutouts, so long as they don't exceed the max. cutout area.
- For an optimum working environment, we recommend that installers always observe good manual handling practices and follow the installation advice as shown on our packaging.

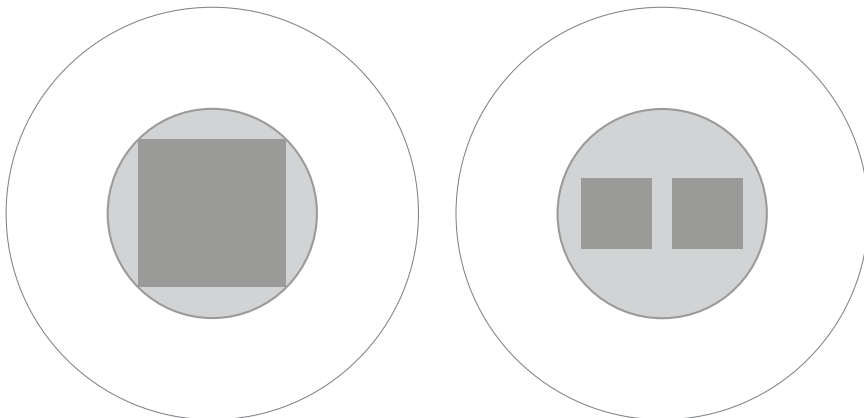

Service integration

Rockfon Eclipse is easy to cut, making integration of service installations very easy. The cutouts can be made with a simple utility knife.

Light installation

Adding lighting fixtures with a weight above 0.25 kg must be done independently. Rockfon System Eclipse Island should not support any additional material or fittings above 0.25 kg.


There is one exception though. A light fixture or beam light can be installed (max. 5 kg) in a Rockfon Eclipse Rectangle 2360 x 1160 mm, as long as all six suspension points are used.



Rockfon Eclipse Rectangle 2360 x 1160 mm


When a light fixture or beam light is installed (max. 5kg), all six suspension points should be used (see page 6).

A: Downlight (or similar service) integrated with yoke

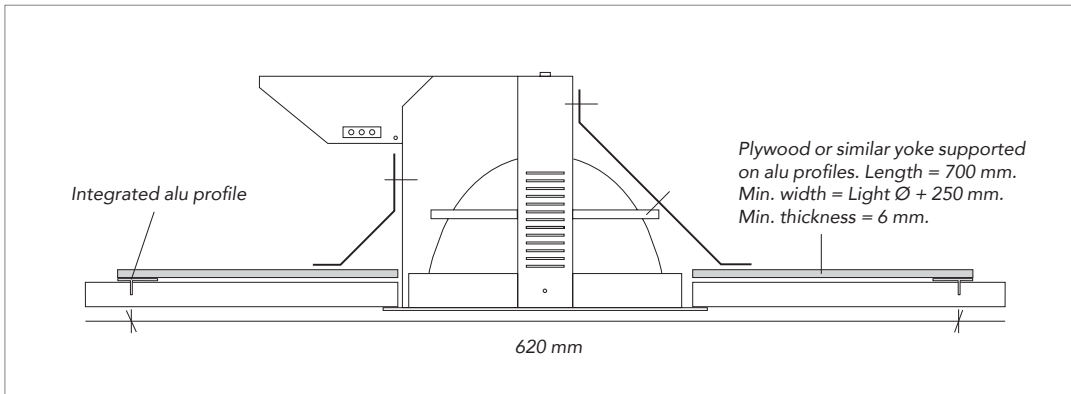

This solution is applicable for lights (or other services) and yokes weighing 5 kg. Cut a hole in the island and centre the yoke to match the size and shape of the light. If using "out of balance" light (as shown), ensure overhang is in line with the length of the yoke. Fit light into the island and yoke.

B: Downlight (or similar service) integrated with support arms

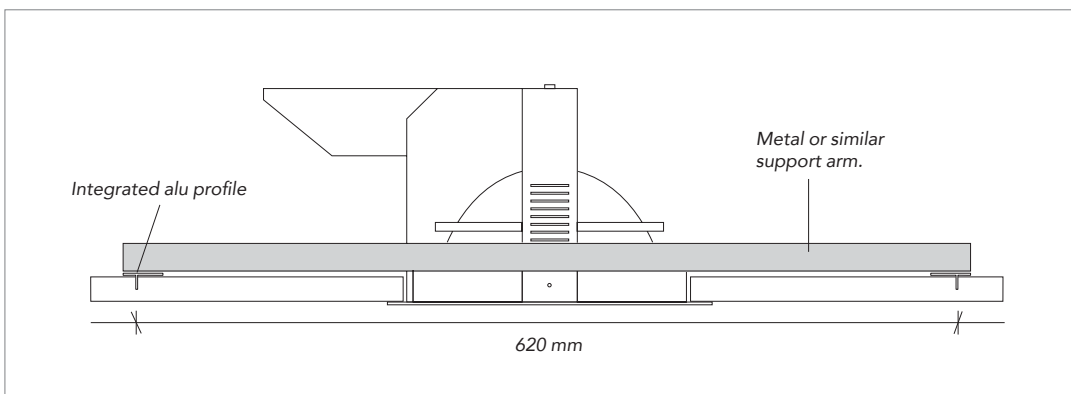


This solution is applicable for lights (or other services) weighing 5 kg. Support the light fixture using two support arms, that are resting on the integrated alu profiles. Cut a hole in the island to match the size and shape of the light fixture. If using "out of balance" light (as shown), ensure overhang is in line with the support arms.

Rockfon Eclipse® Colour with protective film – how to cut a hole for recessed lighting


There are two suggested methods

- A: using a hole saw
- B: using a sharp, long bladed knife

Drill the hole in an anti-clockwise direction (Note that a clockwise direction will tear the protective film).

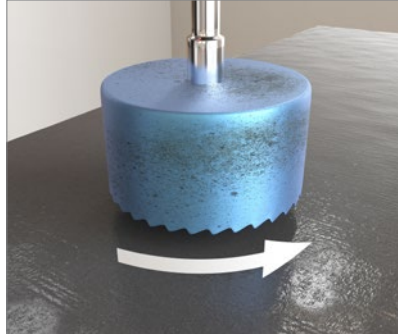



The protective film will protect the surface from any drill dust.

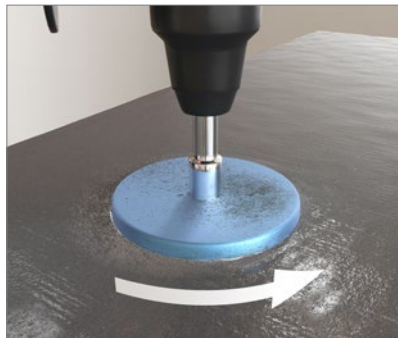

Keep the protective film in place when installing downlights. Install the housing and mounting clip then the bulb.



OR make the cutout manually using a template and a paper cutter knife without removing the protective film.

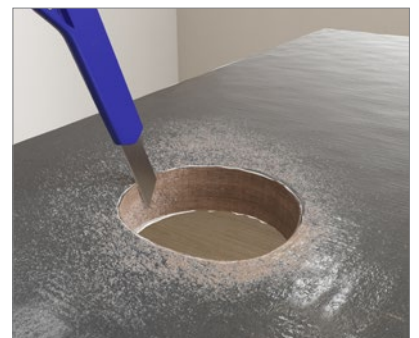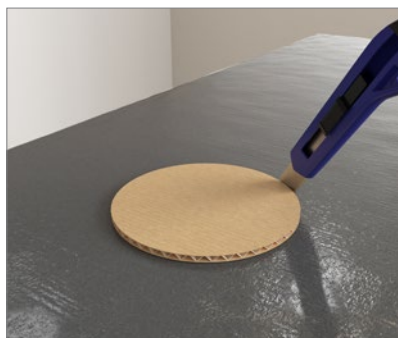

Rockfon Eclipse edge repair filler

Edge repair filler for making good accidental edge damage caused during on-site handling or installation.

This filler was developed to repair dents or small holes, up to 15mm diameter, or scratches that may be caused during product mishandling.

The structure and colour of the filler is identical to factory applied Rockfon Eclipse and Rockfon Contour edge paint, making site repairs virtually undetectable.

It is easy to apply and quick drying.




Tools


We have developed specific tools that are available on www.rockfon.co.uk.



Visit our online CAD Library and/or BIM portal to assist you in your project design.

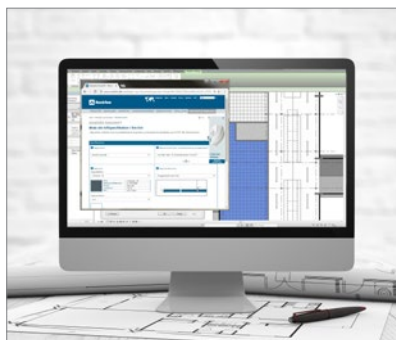

Generate a specification using our NBS Spec Selector specification texts for our products.

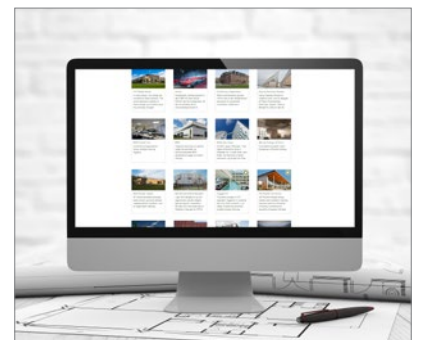

Explore our vast library of case studies for inspiration for your project.

11.2024 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

