

DATASHEET

Rockfon Color-all® wall panel



Sounds Beautiful

Rockfon Color-all® wall panel





- 34 exclusive colours for acoustic wall solutions to inspire and enhance your interior design scheme
- Subtle yet playful colours made to mix and match either within the same room or in different areas of a building
- Complementary Rockfon Color-all ceiling tile range available

Product Description

- Stone wool panel
- Visible side: smooth coloured, matt fleece
- Rear side: back fleece
- Painted edges

Application Areas

- Retail
- Education
- Healthcare
- Office
- Leisure

Edge detail	Module size (mm)	Weight (kg/m ²)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
	600 x 600 x 40	3.1	Rockfon® System T24 A Wall™	39%		2.69	3.78
	1200 x 600 x 40		Rockfon® System T24 A Wall™				
	1800 x 600 x 40		Rockfon® System T24 A Wall™				
	2400 x 600 x 40		Rockfon® System T24 A Wall™				
	1200 x 1200 x 40		Rockfon® System T24 A Wall™				
	1200 x 600 x 20	3.4	Rockfon® System B Adhesive™	38%		3.3	4.26
	600 x 600 x 40	6.4	Rockfon® System B Adhesive™	39%		6.09	7.98
	1200 x 600 x 40		Rockfon® System B Adhesive™				

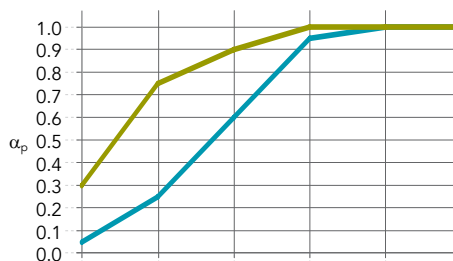
* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : up to 0.95 (Class A)



Thickness (mm) /
 Suspension (incl. tile - mm)

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
20 / 20	0.05	0.25	0.60	0.95	1.00	1.00	0.55	D	0.70
40 / 40	0.30	0.75	0.90	1.00	1.00	1.00	0.95	A	0.95



Reaction to fire
 A1
 Color-All Mercury: Class A2-s1,d0



Light reflection
 Colour-dependent



Humidity and sag resistance
 Up to 100% RH



Cleaning
 - Vacuum



Hygiene
 Stone wool provides no sustenance to microorganisms



Thermal insulation
 Thermal conductivity:
 $\lambda_D = 37 \text{ mW/mK (40mm)}$



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

Rockfon Color-all®

 <p>Mustard - 51 NCS S 2050-Y10R</p> <p>Light reflection: 37%</p>	 <p>Sand - 30 NCS S 2020-Y20R</p> <p>Light reflection: 55%</p>	 <p>Stucco - 20 NCS S 1505-Y30R</p> <p>Light reflection: 70%</p>			
 <p>Scarlet - 71 NCS S 6030-Y80R</p> <p>Light reflection: 8%</p>	 <p>Coral - 76 NCS S 3040-Y90R</p> <p>Light reflection: 22%</p>	 <p>Seashell - 75 NCS S 1510-Y60R</p> <p>Light reflection: 56%</p>	 <p>Petal - 74 NCS S 1005-Y60R</p> <p>Light reflection: 70%</p>		
 <p>Seaweed - 34 NCS S 8005-G20Y</p> <p>Light reflection: 6%</p>	 <p>Eucalyptus - 32 NCS S 6020-B90G</p> <p>Light reflection: 12%</p>	 <p>Sage - 31 NCS S 3010-G10Y</p> <p>Light reflection: 34%</p>	 <p>Mint - 12 NCS S 1005-G10Y</p> <p>Light reflection: 70%</p>		
 <p>Space - 49 NCS S 7020-B</p> <p>Light reflection: 5%</p>	 <p>Storm - 48 NCS S 6020-R90B</p> <p>Light reflection: 55%</p>	 <p>Azure - 47 NCS S 3020-B</p> <p>Light reflection: 34%</p>	 <p>Fresh - 42 NCS S 2010-B10G</p> <p>Light reflection: 51%</p>		
 <p>Earth - 25 NCS S 5010-Y50R</p> <p>Light reflection: 22%</p>	 <p>Clay - 26 NCS S 5005-G80Y</p> <p>Light reflection: 22%</p>	 <p>Linen - 22 NCS S 4005-Y50R</p> <p>Light reflection: 29%</p>	 <p>Sandalwood - 13 NCS S 2010-Y60R</p> <p>Light reflection: 49%</p>	 <p>Chalk - 21 NCS S 2005-Y40R</p> <p>Light reflection: 51%</p>	
 <p>Ebony - 28 NCS S 8505-Y80R</p> <p>Light reflection: 4%</p>	 <p>Cork - 24 NCS S 4010-Y30R</p> <p>Light reflection: 30%</p>	 <p>Hemp - 23 NCS S 3005-Y20R</p> <p>Light reflection: 45%</p>			
 <p>Iron - 18 NCS S 7502-B</p> <p>Light reflection: 7%</p>	 <p>Concrete - 06 NCS S 6000-N</p> <p>Light reflection: 16%</p>	 <p>Mastic - 17 NCS S 4000-N</p> <p>Light reflection: 33%</p>	 <p>Zinc - 05 NCS S 4005-R50B</p> <p>Light reflection: 33%</p>	 <p>Mercury - 62 NCS S 2502-B</p> <p>Light reflection: 44%</p>	
 <p>Charcoal - 09 NCS S 8500-N</p> <p>Light reflection: 4%</p>	 <p>Anthracite - 08 NCS S 7010-R90B</p> <p>Light reflection: 7%</p>	 <p>Gravel - 03 NCS S 3502-B</p> <p>Light reflection: 34%</p>	 <p>Plaster - 02 NCS S 2005-R80B</p> <p>Light reflection: 58%</p>	 <p>Stone - 01 NCS S 2000-N</p> <p>Light reflection: 55%</p>	 <p>Moon - 10 NCS S 1005-R80B</p> <p>Light reflection: 75%</p>

NCS codes are closest colour match - contact us for more information. The actual colour of the ceiling tiles may deviate slightly from printed colours due to the texture of the surface and the underlying colour of stone wool. Samples of the coloured surfaces are available upon request.

06.2024 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

