

DATASHEET

# Rockfon Blanka® dB 43



**Sounds Beautiful**

# Rockfon Blanka® dB 43



- Combines enhanced room to room sound insulation as well as a high level of sound absorption (Class A) for flexible office layouts where confidentiality is important
- Made from a 40mm stone wool core with a high performance membrane on the back which reduces the transmission of noise from room to room
- A smooth, deep matt, super white surface finish with enhanced durability making it more resistant to dirt and everyday wear and tear
- Wide range of dimensions in concealed, semi-concealed and visible grid options
- Light in weight, sound insulating tile, easy to install and cut, cleaned with a vacuum or damp cloth

## Product Description

- Stone wool tile
- Visible side: smooth, deep matt, super white painted fleece
- Rear side: high performance membrane
- Durable painted edges

## Application Areas

- Office
- Healthcare
- Education

Edge detail	Module size (mm)	Weight (kg/m <sup>2</sup> )	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	A1-C4 Full life cycle impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*
 A24	600 x 600 x 40	7.0	50 / 200	Rockfon® System T24 A™	50%		5.49	7.44
	1200 x 600 x 40		50 / 200	Rockfon® System T24 A™				
 D	600 x 600 x 40	7.0	112 / 112	Rockfon® System XL T24 D™	50%		5.49	7.44
 D/AEX	1200 x 300 x 40	7.0	Local	Rockfon® System dB™	50%		5.49	7.44
	1500 x 300 x 40		65 / 165	Rockfon® System Bandraaster Dzn/AEX™				
	1800 x 300 x 40		65 / 165	Rockfon® System Bandraaster Dzn/AEX™				
	1200 x 600 x 40		Local	Rockfon® System dB™				
	1500 x 600 x 40		65 / 165	Rockfon® System Bandraaster Dzn/AEX™				
	1800 x 600 x 40		65 / 165	Rockfon® System Bandraaster Dzn/AEX™				
 E15	600 x 600 x 40	7.0	60 / 200	Rockfon® System T15 E™	50%		5.49	7.44
	1200 x 600 x 40		60 / 200	Rockfon® System T15 E™				
 E24	600 x 600 x 40	7.0	60 / 200	Rockfon® System T24 E™	50%		5.49	7.44
	1200 x 600 x 40		60 / 200	Rockfon® System T24 E™				

MS = Minimum Suspension

When installing Blanka dB43 tiles with D edge in System XL T24 D an additional wire suspension hanger shall be placed on all 1800mm cross tees. The additional hanger shall be positioned approximately 550mm from a main runner.

\* For full environmental impact disclosure, see our product EPDs available on [rockfon.link/uk-epd](https://rockfon.link/uk-epd). Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



## Performance



**Sound absorption**  
 $\alpha_w = 0.90$  (Class A)



**Direct sound insulation**  
 $R_w = 22$  dB




**Room to room sound insulation**  
 $D_{n,f,w} = 43$  dB

$D_{n,f,w}$  with Rockfon Acoustimass = 54\* dB

$D_{n,f,w}$  with Rockfon Soundstop 30 dB = 56\* dB

The sound insulation properties ( $R_w$ ,  $D_{n,f,w}$ ) presented in the datasheet represent A-edge tiles.

\*) Values obtained on the basis of theoretical analysis.

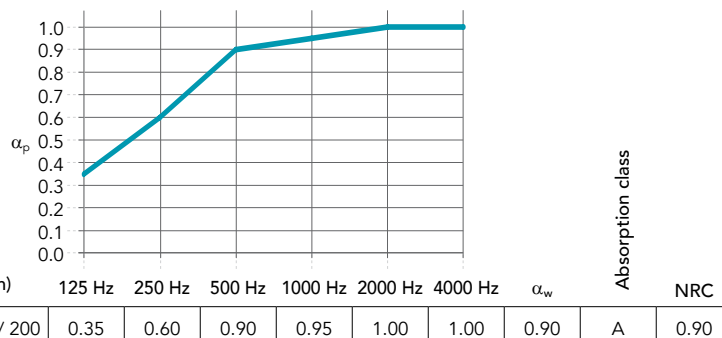

**Reaction to fire**  
 A2-s1,d0



**Light reflection and light diffusion**  
 87% light reflection  
 >99% light diffusion



**Humidity and sag resistance**  
 Up to 100% RH.  
 No visible deflection in high humidity  
 C/0N



**Cleaning**  
 - Vacuum  
 - Damp cloth



**Hygiene**  
 Stone wool provides no sustenance to microorganisms



**Surface durability**  
 Enhanced durability and dirt resistance.

Wet-scrub resistance: Class 4

The wet-scrub resistance is tested in accordance with EN ISO 11998:2006 and rated following EN 12720:2009+A1:2013 scale going from 1 to 5, where 5 is the best.



**Thermal insulation**  
 Thermal conductivity:  $\lambda_D = 40$  mW/mK  
 Thermal resistance:  $R = 1.00$  m<sup>2</sup>/K/W



**Visual appearance**  
 Super white surface  
 L value: 94.5

The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).

Deep matt surface, perfect in critical side-light

Gloss: 0.8 gloss unit at 85° angle

The gloss of the product is tested in accordance with ISO 2813.



**Recyclability**  
 Fully recyclable stone wool



**Indoor environment**

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



**Material Health**

All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

# Sounds Beautiful

