

DATASHEET

Rockfon® CleanSpace Pro



Sounds Beautiful

Rockfon® CleanSpace Pro





- Rockfon CleanSpace Pro is a cleanable ceiling tile with good acoustic properties. Applicable in various practical and industrial room types with cleanability requirements. The product is long-lasting and withstands numerous cleaning and disinfection methods
- Full range of formats in semi-concealed and visible grid options
- High sound absorption (Class A) and highest fire safety (Class A1)
- Low particle emission: ISO Class 4
- Rockfon CleanSpace Pro is HACCP verified ensuring safe application in food- and beverage industry
- Rockfon CleanSpace Pro has an anti-static surface that withstands exposure to dust and enhances the product lifetime

Product Description

- Stone wool tile
- Visible side: smooth white painted, water repellent fleece
- Rear side: back fleece
- Sealed edges

Application Areas

- Healthcare
- Education
- Retail
- Leisure
- Industry

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A24	600 x 600 x 20	2.3	50 / 100	Rockfon® System CleanSpace T24 A, E (ECR)™	37%		2.31	2.91
	1200 x 600 x 20		50 / 100	Rockfon® System CleanSpace T24 A, E (ECR)™				
	600 x 600 x 40	3.3	50 / 100	Rockfon® System CleanSpace T24 A, E (ECR)™	37%		3.32	4.23
	1200 x 600 x 40		50 / 100	Rockfon® System CleanSpace T24 A, E (ECR)™				
 E24	600 x 600 x 20	2.3	60 / 100	Rockfon® System CleanSpace T24 A, E (ECR)™	37%		2.84	3.62
	1200 x 600 x 20		60 / 100	Rockfon® System CleanSpace T24 A, E (ECR)™				

MS = Minimum Suspension

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : 1.00 (Class A)



Reaction to fire
 A1



Light reflection
 85%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Cleaning

- Vacuum
- Damp cloth
- Steam cleaning (twice a year)
- Low pressure foam cleaning (twelve times a year)
- High pressure cleaning (monthly and only applicable for A-edge installation). Max. 80 bar, min. 1 meter distance, water spread at 30° angle, max. water flow 360 L/h. The tiles should be clipped into the grid.
- Chemical resistance: Tested according to ISO 2812-3:2019 and classified in accordance with EN 12720. Rating on a scale from 1 to 5, where 5 is the best. We obtained 5 for the following detergents and disinfectants (monthly disinfection): Active chlorine 2,6%, quaternary ammonium 0,25%, hydrogen peroxide 5%, Ethanol 70% and Isopropanol 70%
- Use only soft equipment directly on the tile surface: cloth or sponge. Avoid scraping or stiff brush rubbing.

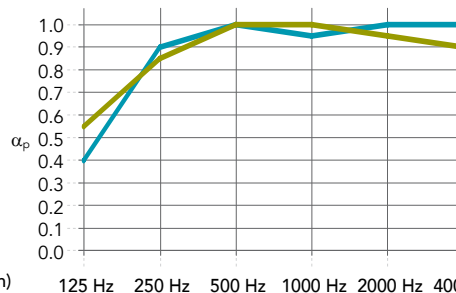


Hygiene
 Stone wool provides no sustenance to microorganisms
 Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013. Tested with:

- *Methicillin resistant staphylococcus aureus (MRSA)*
- *Candida albicans*
- *Aspergillus brasiliensis*
- *E. Coli*
- *Bacillus cereus*

M1 (zone 4) for the 5 tested pathogens.

The particle elimination kinetics class is conform to CP(0.5)5 according to the norm NF S 90-351:2013.



Edge /
 Thickness (mm) /
 Suspension (incl. tile - mm)

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
A,E: 20 / 200	0.40	0.90	1.00	0.95	1.00	1.00	1.00	A	0.95
A: 40 / 200	0.55	0.85	1.00	1.00	0.95	0.90	1.00	A	0.95



Surface durability
 Enhanced durability and dirt resistance.



Disinfection
 - Resistant to using Hydrogen Peroxide Vapor disinfection with impact on aeration time



Clean Room
 ISO Class 4



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

09/2024 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

