


DATASHEET Rockfon® Ligna

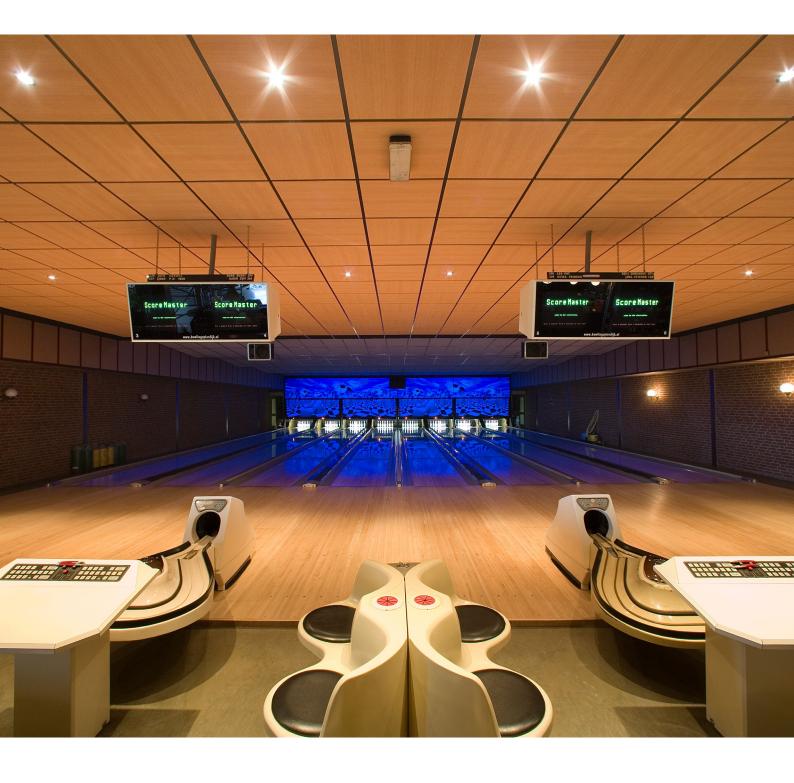

Sounds Beautiful

Rockfon® Ligna

- Warm, wood appearance tile
- Available in three finishes: Dark Beech, Light Beech and Classic Beech
- Highest fire safety (Class A1) and good sound absorption (Class B)

Product Description

- Stone wool tile
- Visible side: smooth non-perforated wood effect
- Rear side: back fleece

Application Areas

- Retail
- Education
- Healthcare
- Office
- Leisure

Edge detail	Module size (mm)	Weight (kg/m²)	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO₂ eq/m²)*
A15	600 x 600 x 20	2.1	50 / 100	Rockfon® System T15 A™	58%	CERTIFIED cradle to cradle SILVER	2.24	2.73
A24	600 x 600 x 20 1200 x 600 x 20	2.1	50 / 100 50 / 100	Rockfon® System T24 A™ Rockfon® System T24 A™	58%	CERTIFIED cradle to cradle SILVER	2.24	2.73

MS = Minimum Suspension

* For full environmental impact disclosure, see our product EPDs available on **rockfon.link/uk-epd**. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Dark Beech



Light Beech



Classic Beech



Performance



Sound absorption α_w: 0.85 (Class B)

		1			1	1			
1	.0								
0	.9								
0	.8								
0	.7								
0	.6								
α _p 0	.5								
	.4							class	
0	.3							G	
0	.2							uo	
	.1							pti	
	.0							Absorption	
Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Ab	NRC
20 / 200	0.45	0.75	0.85	0.80	0.90	0.95	0.85	В	0.80



Reaction to fire A1



Fire protection

The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes.



Humidity and sag resistance

Up to 100% RH. No visible deflection in high humidity C/0N



Hygiene

Cleaning

Vacuum

Stone wool provides no sustenance to microorganisms



Recyclability Fully recyclable stone wool

3

Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health

All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.



Sounds Beautiful

