


DATASHEET

## Rockfon® Sonar®

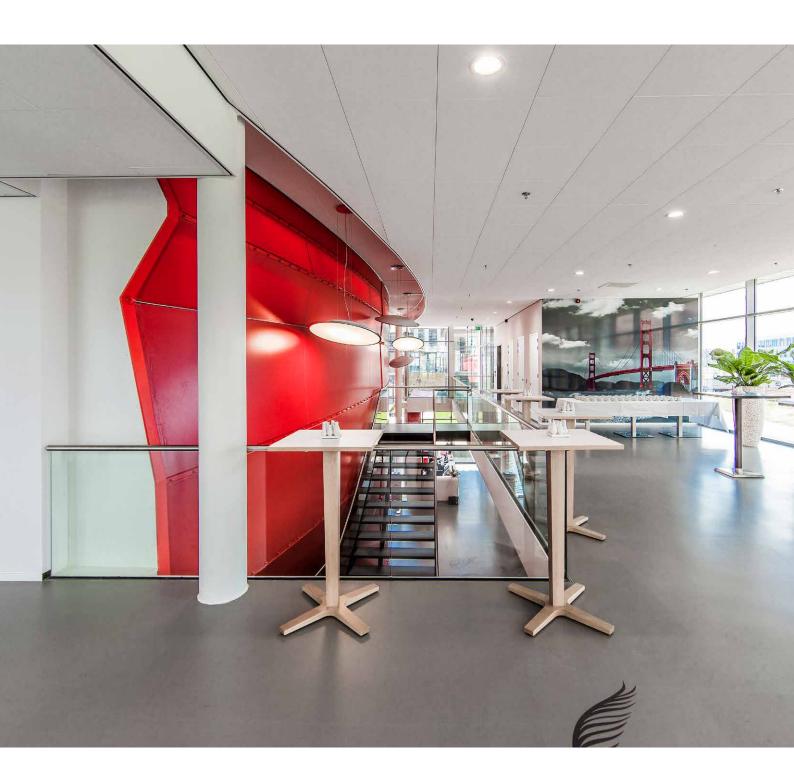

### **Rockfon Sonar®**

- Aesthetic white, micro-textured surface for most applications
- Highest sound absorption/Class A sound absorption and highest fire safety (Class A1)
- Full range of formats and edges for complete design freedom
- Easy to clean with a vacuum and damp cloth

#### **Product Description**

- Stone wool tile

- Visible side: micro-textured white painted fleece

Rear side: back fleeceDurable painted edges

#### **Application Areas**

- Office

- Healthcare

- Education

- Leisure

- Retail

Edge detail	Module size (mm)	Weight (kg/m²)	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	A1-C4 Full life cycle impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	
	600 x 600 x 20		50 / 100	Rockfon® System T15 A™					
A15	1200 x 600 x 20	2.3	50 / 100	Rockfon® System T15 A™	38%	cradle to cradle	2.29		
	600 x 600 x 20	2.3	50 / 100	Rockfon® System T24 A™		CERTIFIED Cradle Cradle to Cradle			
A24	1200 x 600 x 20		50 / 100	Rockfon® System T24 A™			2.29		
	1800 x 600 x 20		50 / 100	Rockfon® System T24 A™	38%				
D	600 x 600 x 20		62 / 62	Rockfon® System T24 Stepped Z D™	38%	CERTIFIED Cradle cradle SILVER	2.57	3.63	
	1200 x 600 x 20	3.4	62 / 62	Rockfon® System T24 Stepped Z D™					
	1800 x 600 x 20		62 / 62	Rockfon® System T24 Stepped Z D™					
	600 x 600 x 20	2.8	60 / 100	Rockfon® System T15 E™	38%	cradle to cradle	3.15	3.94	
E15	1200 x 600 x 20		60 / 100	Rockfon® System T15 E™					
	600 x 600 x 20	2.8	60 / 100	Rockfon® System T24 E™	38%	CERTIFIED © cradle to cradle	3.15	3.94	
E24	1200 x 600 x 20		60 / 100	Rockfon® System T24 E™					
	1800 x 600 x 20		60 / 100	Rockfon® System T24 E™					
Х	600 x 600 x 22 1200 x 600 x 22		67 / 67	Rockfon® System T24 X™	38%	CERTIFIED STATES CONTROL OF CONTR	3.28	4.39	
— î —			67 / 67	Rockfon® System T24 X™					
	1800 x 600 x 22	3.7	67 / 67	Rockfon® System T24 X™					

MS = Minimum Suspension

<sup>\*</sup> For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.




### **Performance**



Sound absorption  $\alpha_{\text{w}}\!\!:$  up to 1.00 (Class A)


Edge /

Thickness (mm) /

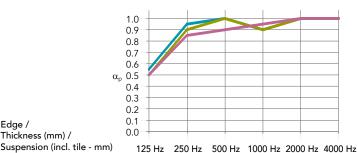

NRC

	A: 20-25 / 200	0.55	0.95	1.00	0.90	1.00	1.00	1.00	А	1.00
	E: 20-25 / 200	0.50	0.90	1.00	0.90	1.00	1.00	1.00	Α	1.00
	Other edges: 20-25 / 200	0.50	0.85	0.90	0.95	1.00	1.00	0.95	А	0.95

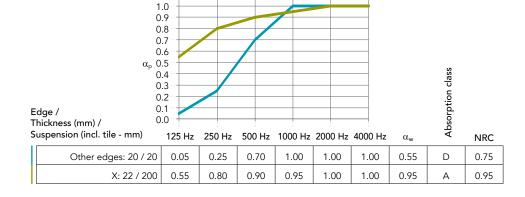



#### Reaction to fire Α1



#### Light reflection 85 %



#### Humidity and sag resistance

Up to 100% RH.

No visible deflection in high humidity C/0N



#### Cleaning

- Vacuum
- Damp cloth
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide.



#### Hygiene

Stone wool provides no sustenance to microorganisms



#### Clean Room

ISO Class 5



#### Impact resistance

Class 3A (Fastening clip) Impact resistance of Rockfon Sonar with edge Z or M mounted with fastening clip has been tested in accordance with EN13964 - Annex D and approved as Class 3A.



#### Recyclability

Fully recyclable stone wool



#### Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:







#### Material Health

All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

# **Sounds Beautiful**