

DATASHEET

# Chicago Metallic Bandraster + Standard Z




**Sounds Beautiful**

# Chicago Metallic Bandraster + Standard Z

- A ceiling system suitable for large spaces where a linear ceiling pattern is required
- Provides great flexibility for large span distances and the positioning of partition walls
- Combines a Bandraster main runner (available in five widths BR 50mm – BR 150mm) and a series of Z profiles installed perpendicular to the main runner and to ensure the stability of the system

## Cross-section

## Compatible tiles

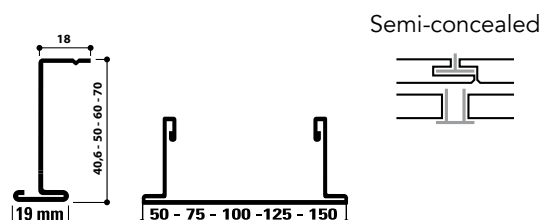

## Assortment

| Product group             |   | Component description                        | Height (mm) | Length (mm) | Colour                 | Pcs per pack | Lm per pack | Kg per pack | Carton per pallet | Kg per pallet |
|---------------------------|---|--|-------------|-------------|------------------------|--------------|-------------|-------------|-------------------|---------------|
| <b>Main runner</b>        |   |  |             |             |                        |              |             |             |                   |               |
| BR50                      |  | Bandraster main runner 50mm – without slots  | 35.4        | 3600        | 04, 11, 001            | 8            | 28.8        | 23.7        | 50                | 1185          |
| BR75                      |  | Bandraster main runner 75mm                  | 35.4        | 3600        | 04, 11, 001            | 8            | 28.8        | 27.5        | 35                | 964           |
| BR100                     |  | Bandraster main runner 100mm - without slots | 35.4        | 3600        | 04, 11, 001            | 8            | 28.8        | 30.9        | 30                | 928           |
| BR125                     |  | Bandraster main runner 125mm                 | 35.4        | 3600        | 04, 001                | 4            | 14.4        | 20.4        | 35                | 713           |
| BR150                     |  | Bandraster main runner 150mm                 | 35.4        | 3600        | 04, 001                | 4            | 14.4        | 22.4        | 30                | 672           |
| <b>Z-section</b>          |   |  |             |             |                        |              |             |             |                   |               |
| Z40                       |  | Z-section 40mm                               | 40.6        |             |                        | 20           |             |             | 80                |               |
| Z50                       |  | Z-section 50mm                               | 50          |             |                        | 20           |             |             | 80                |               |
| Z70                       |  | Z-section 70mm                               | 70.6        |             |                        | 10           |             |             | 80                |               |
| Z40 HOOK                  |  | Z-section 40mm with hook                     | 40.6        |             |                        | 20           |             |             | 80                |               |
| Z50 HOOK                  |  | Z-section 50mm with hook                     | 50          |             |                        | 20           |             |             | 80                |               |
| Z70 HOOK                  |  | Z-section 70mm with hook                     | 70.6        |             |                        | 10           |             |             |                   |               |
| <b>Wall angle options</b> |   |  |             |             |                        |              |             |             |                   |               |
| L19x32                    |  | Perimeter wall angle trim 32 x 19 x 3050mm   | 32          | 3050        | Color-all, 88, 001, 11 | 40           | 122         | 27.3        | 60                | 1635          |
| W8x12                     |  | Shadow angle 15 x 12 x 8 x 15 x 3050mm       | 15          | 3050        | 001, 11, 04, 88        | 30           | 91.5        | 17.9        | 60                | 1075          |

There are compatible accessories for all width of Bandrasters, 50-150mm. See Rockfon System Bandraster Dzn/AEX for further information. Please note that some - not all - products are available in colour. To see which colours are available, please check the assortment table in the relevant Product Datasheet. If you need further assistance or have specific colour preferences, please contact Rockfon.



| Product group      |   | Component description               | Height (mm) | Length (mm) | Colour | Pcs per pack | Lm per pack | Kg per pack | Carton per pallet | Kg per pallet |
|--------------------|---|-------------------------------------|-------------|-------------|--------|--------------|-------------|-------------|-------------------|---------------|
| <b>Accessories</b> |   |                                     |             |             |        |              |             |             |                   |               |
| BR50 LC            |  | Length coupling for bandraster 50mm |             |             |        | 25           |             | 1.6         |                   |               |
| BR50 WC            |  | Wall connector for bandraster 50mm  |             |             |        | 25           |             | 1.5         |                   |               |
| BR50 H             |  | Flat hanger for bandraster 50mm     | 100         |             |        | 100          |             | 1.9         |                   |               |
| BR50 HB            |  | Bent hanger for bandraster 50mm     | 84.5        |             |        | 100          |             | 1.8         |                   |               |
| BR50 CC            |  | Cross connector for bandraster 50mm |             |             |        | 25           |             | 1.5         |                   |               |
| NH BR50            |  | Nonius hanger for bandraster 50mm   | 133.3       |             |        | 100          |             | 3.4         |                   |               |
| WSF                |  | Wall Spring FIXT                    |             |             |        | 100          |             | 0.6         |                   |               |

There are compatible accessories for all width of Bandrasters, 50-150mm. See Rockfon System Bandraster Dzn/AEX for further information. Please note that some - not all - products are available in colour. To see which colours are available, please check the assortment table in the relevant Product Datasheet. If you need further assistance or have specific colour preferences, please contact Rockfon.

# Performance



## Load bearing capacity

It is recommended to use a Z profile with hook every 3 to 5 panels, depending on the width of the panel:  $300\text{ mm} = 5 / 600\text{ mm} = 3$ .

| max. span (mm) - maximum deflection = L/500 (max. 4 mm) |                    |                              |      |      |      |      |
|---|--------------------|------------------------------|------|------|------|------|
| Z-section 40 mm   | axis/axis distance | maximum hanger distance (mm) |      |      |      |      |
|   |                    | kg/m <sup>2</sup> of ceiling |      |      |      |      |
|   |                    | 3                            | 5    | 7    | 9    | 12   |
| Z-section 40 mm   | 300                | 2790                         | 2540 | 2370 | 2240 | 2100 |
|   | 400                | 2650                         | 2390 | 2220 | 2100 | 1970 |
|   | 500                | 2540                         | 2280 | 2120 | 2000 | 1870 |
|   | 600                | 2440                         | 2190 | 2030 | 1920 | 1790 |

It is recommended to use a Z profile with hook every 3 to 5 panels, depending on the width of the panel:  $300\text{ mm} = 5 / 600\text{ mm} = 3$ .

| max. span (mm) - maximum deflection = L/500 (max. 4 mm) |                    |                              |      |      |      |      |
|---|--------------------|------------------------------|------|------|------|------|
| Z-section 50 mm   | axis/axis distance | maximum hanger distance (mm) |      |      |      |      |
|   |                    | kg/m <sup>2</sup> of ceiling |      |      |      |      |
|   |                    | 3                            | 5    | 7    | 9    | 12   |
| Z-section 50 mm   | 300                | 3220                         | 2930 | 2740 | 2600 | 2430 |
|   | 400                | 3060                         | 2770 | 2580 | 2440 | 2280 |
|   | 500                | 2930                         | 2640 | 2450 | 2320 | 2170 |
|   | 600                | 2830                         | 2540 | 2360 | 2220 | 2080 |

It is recommended to use a Z profile with hook every 3 to 5 panels, depending on the width of the panel:  $300\text{ mm} = 5 / 600\text{ mm} = 3$ .

| max. span (mm) - maximum deflection = L/500 (max. 4 mm) |                    |                              |      |      |      |      |
|---|--------------------|------------------------------|------|------|------|------|
| Z-section 60 mm   | axis/axis distance | maximum hanger distance (mm) |      |      |      |      |
|   |                    | kg/m <sup>2</sup> of ceiling |      |      |      |      |
|   |                    | 3                            | 5    | 7    | 9    | 12   |
| Z-section 60 mm   | 300                | 3460                         | 3160 | 2960 | 2810 | 2640 |
|   | 400                | 3290                         | 2990 | 2780 | 2640 | 2470 |
|   | 500                | 3160                         | 2850 | 2650 | 2510 | 2350 |
|   | 600                | 3050                         | 2740 | 2550 | 2400 | 2250 |

It is recommended to use a Z profile with hook every 3 to 5 panels, depending on the width of the panel:  $300\text{ mm} = 5 / 600\text{ mm} = 3$ .

| max. span (mm) - maximum deflection = L/500 (max. 4 mm) |                    |                              |      |      |      |      |
|---|--------------------|------------------------------|------|------|------|------|
| Z-section 70 mm   | axis/axis distance | maximum hanger distance (mm) |      |      |      |      |
|   |                    | kg/m <sup>2</sup> of ceiling |      |      |      |      |
|   |                    | 3                            | 5    | 7    | 9    | 12   |
| Z-section 70 mm   | 300                | 3770                         | 3450 | 3230 | 3070 | 2880 |
|   | 400                | 3590                         | 3260 | 3040 | 2880 | 2700 |
|   | 500                | 3450                         | 3120 | 2900 | 2740 | 2570 |
|   | 600                | 3330                         | 3000 | 2790 | 2630 | 2460 |



## Reaction to fire

A1



## Corrosion Resistance

B



## Environment

Fully recyclable

# Understanding the performance of Chicago Metallic grids and accessories



## Reaction to fire

Reaction to fire is classified in accordance with EN 13501-1. Chicago Metallic steel grids and accessories are non-combustible.



## Fire resistance

A range of Chicago Metallic steel grids are tested in combination with different Rockfon tiles and are classified in accordance with European norm EN 13501-2 and/or national norms.



## Colours

Chicago Metallic grids are available in various colours from the RAL and NCS systems, which are measured following the ISO 7724-2 and ISO 7724-3 standards. The actual colours may deviate slightly from the RAL and NCS references. Chicago Metallic grids are available in a variety of finishes from matt to high gloss, with a respective average of < 5, 15 and 50 units at a 60° angle. The matt finishing is measured at an angle of 85°. See the colour legend for their average values. The gloss unit is measured in accordance with EN13523 part 2.



## Corrosion resistance

Chicago Metallic products produced from hot dip galvanised steel following the Sendzimir process comply with the corrosion classes of the product standard EN 13964 (A, B, C, D). The standard systems in class B are protected with 100 g/m<sup>2</sup> zinc evenly applied on both sides. The enhanced corrosion resistance (ECR) systems and accessories in class C or D have respectively a layer of 100 g/m<sup>2</sup> and 275 g/m<sup>2</sup> zinc evenly applied on both sides and are protected with an additional layer of 20 micron paint per side.



## Load bearing performance

The load bearing performance (max. kg/m<sup>2</sup> load applicable to the grid system without exceeding the allowable deflection of the individual components) is tested in accordance with the EN 13964 standard. The accumulative value of the system deflection, shown on the data sheets, does not exceed the max. deflection as given in class 1 of the standard. Special project configurations deviating from the standard module sizes mentioned in the data sheets must be calculated by Rockfon technical services.



## Cleaning

All Chicago Metallic grids can be cleaned with water and a mild detergent in combination with a melamine foam sponge or microfiber cloth.

## Colour legend

Please note that some – not all – products are available in colour. To see which colours are available, please check the assortment table in the relevant Product Datasheet. If you need further assistance or have specific colour preferences, please contact Rockfon.

|   |   |  |  |  |
|---|---|--|--|--|
| White 001<br>RAL 9003                                       | White 901<br>RAL 9010                                     | White 01<br>White 916                                      | Matt White 11<br>RAL 9003                                      | L value: 93<br>Gloss: 2 at both a<br>60° and 85° angle |
| Platinum 54<br>RAL 7035                                     | Alugrey 04<br>RAL 9006                                    | Galvanised 00<br>Galvanised 69                             | Matt Black 88<br>RAL 9004                                      | Gloss: 4.5 at 60° angle<br>and 11.5 at 85° angle       |
| Brushed Alu 534   | High Gloss<br>Chrome 14                                   | Carrara 57   | High Gloss<br>Brass 16   |  |
| White 001 /<br>White 001<br>(8WW)<br>RAL 9003 /<br>RAL 9003 | Black 08 /<br>Black 08<br>(8BB)<br>RAL 9005 /<br>RAL 9005 | White 001 /<br>Black 08<br>(8WB)<br>RAL 9003 /<br>RAL 9005 | Alugrey<br>04 /<br>Black 08<br>(8GB)<br>RAL 9006 /<br>RAL 9005 |  |

# Rockfon Color-all®

|                                 |                                    |                                  |                                    |                                  |                              |
|---------------------------------|------------------------------------|----------------------------------|------------------------------------|----------------------------------|------------------------------|
| Mustard - 51<br>NCS S 2050-Y20R | Sand - 30<br>NCS S 1020-Y30R       | Stucco - 20<br>NCS S 1005-Y20R   |                                    |                                  |                              |
| Scarlet - 71<br>NCS S 5040-Y90R | Coral - 76<br>NCS S 3040-Y90R      | Seashell - 75<br>NCS S 1010-Y70R | Petal - 74<br>NCS S 1005-Y60R      |                                  |                              |
| Seaweed - 34<br>NCS S 8005-G    | Eucalyptus - 32<br>NCS S 6020-B90G | Sage - 31<br>NCS S 3010-G10Y     | Mint - 12<br>NCS S 0505-G10Y       |                                  |                              |
| Space - 49<br>NCS S 7020-B      | Storm - 48<br>NCS S 5030-R90B**    | Azure - 47<br>NCS S 3020-B       | Fresh - 42<br>NCS S 2010-B10G      |                                  |                              |
| Earth - 25<br>NCS S 5010-Y50R   | Clay - 26<br>NCS S 5005-G50Y       | Linen - 22<br>NCS S 4005-Y50R    | Sandalwood - 13<br>NCS S 2010-Y70R | Chalk - 21<br>NCS S 2005-Y40R    |                              |
| Ebony - 28<br>NCS S 8005-R      | Cork - 24<br>NCS S 4010-Y30R       | Hemp - 23<br>NCS S 3005-Y        |                                    |                                  |                              |
| Iron - 18<br>NCS S 7502-B       | Concrete - 06<br>NCS S 5502-B      | Mastic - 17<br>NCS S 4000-N      | Zinc - 05<br>NCS S 4005-R50B       | Mercury - 62<br>NCS S 3005-R80B* |                              |
| Charcoal - 09<br>NCS S 8500-N   | Anthracite - 08<br>NCS S 7005-B    | Gravel - 03<br>NCS S 3502-B      | Plaster - 02<br>NCS S 2005-R80B    | Stone - 01<br>NCS S 2000-N       | Moon - 10<br>NCS S 1005-R80B |

\* Colour contains effect pigments.

\*\* Colour is between NCS S 5030-R90B and NCS S 6030-R90B.

Please note that some – not all – products are available in colour. To see which colours are available, please check the assortment table in the relevant Product Datasheet. If you need further assistance or have specific colour preferences, please contact Rockfon.

NCS codes are closest colour match. The actual colour of the Rockfon Color-all® grid may deviate slightly from printed colours due to the texture of the surface. Samples are available upon request.

09.2024 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

# Sounds Beautiful

